

# SINEAX V604s


## Programmable multifunctional transmitter

**for direct currents, direct voltages, temperature sensors, teletransmitters or potentiometers**



SINEAX V604s is a multifunctional transmitter for top-hat rail assembly with the following main characteristics:

- Measurement of DC voltage, DC current, temperature (RTD, TC) and resistance
- Sensor connection without any external jumpers
- 2 inputs (e.g. for sensor redundancy or difference formation)
- 2 outputs (U and / or I)
- DC- energy meter - function (with S0 output)
- 2 inputs can be linked with each other and allocated to the 2 outputs which enables calculations and sensor monitoring (e.g. prognostic maintenance of sensors).
- System capability: Communication via Modbus interface
- Freely programmable relay, e.g. for limit or alarm signalling
- Digital output (optional)
- AC/DC wide-range power supply unit
- Pluggable high-quality screw or spring cage terminals

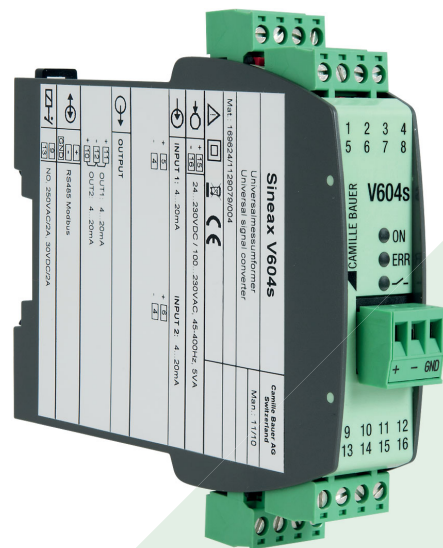

All settings of the instrument can be adapted to the measuring task by PC software. The software also serves visualising, commissioning and service.

**Table 1: Input variables, measuring ranges**

| Type of measurement | Measuring range              | Minimum span |
|---------------------|------------------------------|--------------|
| DC voltage [mV]     | -1000 ... 1000 mV            | 2 mV         |
| DC voltage [V]      | -600 ... 600 V <sup>1)</sup> | >1 V         |
| DC current [mA]     | -50 ... 50 mA                | 0.2 mA       |
| Resistance [Ω]      | 0 ... 5000 Ω                 | 8 Ω          |
| RTD Pt100           | -200 ... 850 °C              | 20 K         |
| RTD Ni100           | -60 ... 250 °C               | 15 K         |
| TC Type B           | 0 ... 1820 °C                | 635 K        |
| TC Type E           | -270 ... 1000 °C             | 34 K         |
| TC Type J           | -210 ... 1200 °C             | 39 K         |

| Type of measurement | Measuring range  | Minimum span |
|---------------------|------------------|--------------|
| TC Type K           | -270 ... 1372 °C | 50 K         |
| TC Type L           | -200 ... 900 °C  | 38 K         |
| TC Type N           | -270 ... 1300 °C | 74 K         |
| TC Type R           | -50 ... 1768 °C  | 259 K        |
| TC Type S           | -50 ... 1768 °C  | 265 K        |
| TC Type T           | -270 ... 400 °C  | 50 K         |
| TC Type U           | -200 ... 600 °C  | 49 K         |
| TC Typ W5Re-W26Re   | 0 ... 2315 °C    | 135 K        |
| TC Type W3Re-W25Re  | 0 ... 2315 °C    | 161 K        |

1) In case of anterior device versions, the measuring range or the overload capacity is only -300...300V. Please check device version on the nameplate or with the PC software CB-Manager.

# SINEAX V604s

## Programmable multifunctional transmitter

### Technical data

#### Measuring input 1

##### Direct voltage

|  |   |
|--|---|
| Measuring range mV                                       | For limits see table 1<br>Ri > 10 MΩ,<br>continuous overload max. ±1200 mV            |
| Measuring range V<br>(only in corresponding device type) | For limits see table 1<br>Ri = 3 MΩ,<br>continuous overload max. ±600 V <sup>1)</sup> |

##### Direct current

|                    |   |
|--------------------|---|
| Measuring range mA | For limits see table 1<br>Ri = 11 Ω,<br>continuous overload max. ±50 mA |
|--------------------|---|

#### Resistance thermometer RTD

|                              |  |
|------------------------------|--|
| Resistance measurement types | Pt100 (IEC 60751),<br>adjustable Pt20...Pt1000<br>Ni100 (DIN 43760),<br>adjustable Ni50...Ni1000 |
| Measuring range limits       | See table 1  |
| Wiring                       | 2, 3 or 4-wire connection  |
| Measuring current            | 0.2 mA   |
| Line resistance              | 30 Ω per line,<br>in 2-wire connection adjustable or<br>calibratable                             |

#### Thermocouples TC

|                            |   |
|----------------------------|---|
| Thermocouples              | Type B, E, J, K, N, R, S, T<br>(IEC 60584-1)<br>Type L, U (DIN 43760)<br>Type W5Re-W26Re, W3Re-<br>W25Re (ASTM E988-90) |
| Measuring range limits     | See Table 1   |
| Cold junction compensation | Internal (with installed Pt100),<br>with Pt100 on terminals or<br>external with reference junction<br>-20...70 °C       |

#### Resistance measurement, teletransmitter, potentiometer

|                            |  |
|----------------------------|--|
| Measuring range limits     | See table 1  |
| Wiring                     | 2, 3 or 4-wire connection  |
| Resistance teletransmitter | Type WF and WF DIN   |
| Measuring current          | 0.2 mA   |
| Line resistance            | 30 Ω per line,<br>in 2-wire connection adjustable or<br>calibratable |

#### Measuring input 2

##### Direct current

|   |                           |
|---|---------------------------|
| Measuring range mA<br>(only in corresponding device type) | Same as measuring input 1 |
|---|---------------------------|

##### Direct voltage

|                    |                           |
|--------------------|---------------------------|
| Measuring range mV | Same as measuring input 1 |
|--------------------|---------------------------|

#### Resistance thermometer RTD

Same as measuring input 1 except:  
Wiring 2 or 3 wire connection

#### Thermocouples TC

Same as measuring input 1

#### Resistance measurement, teletransmitter, potentiometer

Same as measuring input 1 except:  
Wiring 2 or 3 wire connection

#### Please note

The following device types are available:

a) V604s with measuring input for 1x direct current [mA] and 1x high direct voltage [V]  
The direct voltage [V] and direct current [mA] measuring methods can be allocated to Input 1 or Input 2 here.

b) V604s with measuring input for 2x direct current [mA]

The different device types are firm and cannot be reprogrammed!

The measuring inputs 1 and 2 are galvanically connected. If 2 input sensors or input variables are used, observe combination options in Table 3 and circuit instructions contained in the operating instructions!

#### Analog outputs 1 and 2

The two outputs are galvanically connected and have a common earth. Voltage and current output software-configurable.

##### Direct current

|                      |                                     |
|----------------------|-------------------------------------|
| Output range         | ± 20 mA,<br>range may be freely set |
| Burden voltage       | max. 12 V                           |
| Open circuit voltage | < 20 V                              |
| Limit                | Adjustable, max. ±22 mA             |
| Residual ripple      | <1% pp related to 20 mA             |

##### Direct voltage

|                 |                                    |
|-----------------|------------------------------------|
| Output range    | ± 10 V,<br>range may be freely set |
| Load            | max. 20 mA                         |
| Current limit   | Approx. 30 mA                      |
| Limit           | Adjustable, max. ±11 V             |
| Residual ripple | <1% pp related to 10 V             |

##### Output settings

|                      |  |
|----------------------|--|
| Limit                |  |
| Gain/offset trimming |  |
| Inversion            |  |

#### Relay contact output

##### Variant Relay:

|                    |                                    |
|--------------------|------------------------------------|
| Contact            | 1 pole, normally open contact (NO) |
| Switching capacity | AC: 2 A / 250 V<br>DC: 2 A / 30 V  |

##### Variant digital output:

|                    |  |
|--------------------|--|
| Contact            | Transistor, normally open contact (NO) |
| Switching capacity | max. 27VDC/27mA                        |

## Programmable multifunctional transmitter

### Bus/programming connection

Interface, protocol RS-485, Modbus RTU  
Baudrate 9.6...115.2 kBaud, adjustable

### Transmission behaviour

Measured quantities for the outputs

- Input 1
- Input 2
- Input 1 + input 2
- Input 1 – input 2
- Input 2 – input 1
- Input 1 · input 2
- Minimum value, maximum value or mean value of input 1 and input 2
- Sensor redundancy Input 1 or input 2

Transmission functions Linear, Absolute amount, scaling (gain/ offset), magnifier function (zoom)  
user-specific via basic value table (24 basic values per measured variable)

Settling time: Adjustable 1...30 s

### Limit values and monitoring

Number of limitvalues 2

Measured variable for the limit values

- Input 1
- Input 2
- Measured variable for outputs
- Input 1 – input 2 (e.g. drift monitoring in case of 2 sensors)
- Input 2 – input 1 (e.g. drift monitoring in case of 2 sensors)
- Meter 1

Functions Absolute amount  
Gradient dx/dt (e.g. temperature gradient monitoring)

Time delay Adjustable 0...3600 s

Signalling Relay contact or digital output, alarm LED, status 1

### Meter and pulse output

#### Meter 1:

Number 1

Meter source Measured variables for outputs 1 or 2

Settings Mode (pos., neg.), unit (prefix, s/min/h), meter reset / set

#### Pulse output 1 (variant digital output)

Standard: S0 interface according to IEC/EN 62053-31

Settings Pulse duration (30...250ms), pulse rate

Signalling Digital output

### Sensor breakage and short circuit monitoring measuring input

Signalling Relay contact or digital output, alarm LED, status 1  
Output value in case of a fault

Signalling to alarm LED

In case of a sensor error, the defective input (1 or 2) is signalled by the number of flashes of the alarm LED (1x or 2x).  
In case of a failure at both inputs: Alarm LED does not flash.

### Other monitoring operations

Drift monitoring

Monitoring of measured value difference between 2 input sensors for a certain period of time (e.g. due to different sensor response times).  
If the limit value is exceeded for this time, an alarm is signalled. (See limit values 1 and 2)

Sensor redundancy

Measurement with 2 temperature sensors; if sensor 1 fails (fault) sensor 2 is activated for bridging (see measuring quantities for outputs)

### Alarm signalling

Relay contact or digital output

With closed contact, the yellow LED shines, invertible alarmfunction

Alarm LED

Time delay

Adjustable 0...60 s

Output value in case of a fault


For sensor breakage and short circuit, value adjustable –10...110%

### Power supply

| Rated voltage UN            | Tolerance |
|-----------------------------|-----------|
| 24...230 V DC               | ±15%      |
| 100...230 V AC, 50...400 Hz | ±15%      |

Power consumption >3 W or 7 VA

### Displays at the instrument

| LED   | Color          | Function            |
|---|----------------|---------------------|
| ON  | green          | Power on            |
|   | green flashing | Communication activ |
| ERR   | red            | Alarm               |
|  | yellow         | Relais on           |

### Configuration, programming

Operation with PC software «CB-Manager»

# SINEAX V604s

## Programmable multifunctional transmitter

### Accuracies (according to EN/IEC 60770-1)

#### Reference conditions

|                       |  |
|-----------------------|--|
| Ambient temperature   | 23 °C ± 2 K  |
| Power supply          | 24 V DC  |
| Reference value       | Span   |
| Settings              | Input 1: Direct voltage mV,<br>0...1000 mV<br>Output 1: 4...20 mA, burden<br>resistance 300 Ω<br>Mains frequency 50 Hz,<br>Setting time 1 s<br>Input 2, output 2, relay, monitor-<br>ing off or not active, for voltage<br>output: range 0...10 V, burden<br>resistance 2 kΩ |
| Installation position | Vertically, detached   |

#### Basic accuracy

|   |   |
|---|---|
| At reference conditions                             | ±0.1%   |
| <i>Other types of measurement and input ranges:</i> |   |
| RTD Pt100, Ni100                                    | ±0.1% ±0.2 K  |
| Resistance measurement                              | ±0.1% ±0.1 Ω  |
| TC Type K, E, J, T, N, L, U                         | ±0.1% ±0.4 K,<br>measurement value > -100 °C          |
| TC Type R, S  | ±0.1% ±2.4 K  |
| TC Type B   | ±0.1% ±2.4 K,<br>measurement value > 300°C            |
| TC W5Re-W26Re,<br>W3Re-W25Re                        | ±0.1% ±2.0 K  |
| DC voltage mV                                       | ±0.1% ±0.015 mV                                       |
| DC voltage V  | U ≤ 300V ±0.1% ±0.0045 V<br>U > 300V +/-0.15%+0.0045V |
| DC current mA                                       | ±0.1% ±0.0015 mA                                      |

#### Additional error (additive)

|   |   |
|---|---|
| High range minimum value<br>(Minimum value >40%<br>of maximum value): | ±0.1% of maximum value  |
| Small output range  | ±0.1% * (reference range / new<br>range)  |
| Cold junction<br>compensation internal                                | ±3 K  |
| Magnifier function  | ± Zoom factor x (basic accuracy +<br>additional error)<br>Zoom factor = measured variable<br>range / zoom range |

#### Influencing factors

|                                       |   |
|---------------------------------------|---|
| Ambient temperature                   | ±0.1% per 10 K at reference con-<br>ditions<br>other settings: basic accuracy and<br>additional errors per 10 K |
| Long-term drift                       | ±0.1%   |
| Common mode/<br>series mode influence | ±0.2%   |

### Ambient conditions

|                       |  |
|-----------------------|--|
| Operating temperature | -25 ... +55 °C                               |
| Storage temperature   | -40 ... +70 °C                               |
| Relative humidity     | ≤75%, no condensation                        |
| Range of utilisation  | Internal room up to 2000m above<br>sea level |

### Installation details

|            |  |
|------------|--|
| Design     | Top-hat rail housing U4<br>Combustibility class V-0<br>according to UL 94                      |
| Dimensions | See dimensional drawing  |
| Assembly   | For snap-on fastening on top-hat<br>rail (35 x 15 mm or 35 x 7.5 mm)<br>according to EN 50 022 |
| Terminals  | Pluggable, 2.5 mm <sup>2</sup><br>Front plug spring terminal 1.5 mm <sup>2</sup>               |
| Weight     | 0.14 kg  |

### Product safety, regulations


|   |  |
|---|--|
| Electromagnetic compatibility                                 | EN 61 000-6-2 / 61 000-6-4   |
| Ingress protection (acc. IEC 529 or EN 60 529)                | Housing IP 40<br>terminal IP20   |
| Electric design   | Acc. IEC or EN 61 010  |
| Degree of pollution   | 2  |
| Between power supply and all circuits                         | Reinforced insulation<br>overvoltage category III<br>operating voltage 300 V<br>test voltage 3.7 kV AC rms   |
| Between the measuring input (1+2) and all circuits            | Reinforced insulation<br>overvoltage category III<br>operating voltage 300 V<br>overvoltage category II<br>operating voltage 600 V<br>test voltage 3.7 kV AC rms |
| Between output (1 + 2) and relay contact resp. digital output | Reinforced insulation<br>overvoltage category II<br>Working voltage 300 V<br>Test voltage 2.3 kV AC rms  |
| Between output (1 + 2) and the bus connection                 | Functional insulation<br>Working voltage <50 V<br>Test voltage 0.5 kV AC rms   |
| Environmental tests   | EN 60068-2-1/-2/-3<br>EN 60068-2-27 Shock: 50g,<br>11ms, sawtooth, half-sine<br>EN 60068-2-6 Vibration:<br>0.15mm/2g, 10...150Hz,<br>10 cycles                   |

## Programmable multifunctional transmitter

### Electric connections

| Circuit                        | Terminal                         | Remarks                          |
|--------------------------------|----------------------------------|----------------------------------|
| Measuring input                | 1 to 8                           | See table 2                      |
| Output 1<br>Output 2           | 11 (+), 12 (-)<br>10 (+), 12 (-) |                                  |
| Relay contacts                 | 9 (+), 13 (-)                    | +, -: polarity at digital output |
| Power supply                   | 15 (+/-)<br>16 (-/-)             | Note polarity at DC              |
| Bus/<br>programming connection | +, -, GND                        | Front plug                       |

Variant digital output:



**Table 2: Connection of inputs**

Please note: If 2 input sensors or input variables are used, observe combination options in Table 3 and circuit instructions contained in the operating instructions!

| Type of measurement   | Wiring  |         |
|---|---------|---------|
|   | Input 1 | Input 2 |
| Direct voltage mV   |         |         |
| Thermocouple with external cold junction thermostat or internally compensated |         |         |
| Thermocouple with Pt100 at the terminals at the same input                    |         |         |

| Type of measurement   | Wiring  |         |
|---|---------|---------|
|   | Input 1 | Input 2 |
| Thermocouple with Pt100 at the terminals at the other input |         |         |
| Resistance thermometer or resistance measurement 2-wire     |         |         |
| Resistance thermometer or resistance measurement 3-wire     |         |         |
| Resistance thermometer or resistance measurement 4-wire     |         |         |
| Resistance-teletransmitter WF                               |         |         |
| Resistance-teletransmitter WF-DIN                           |         |         |
| Direct voltage V (only in corresponding device type)        |         |         |

# SINEAX V604s

## Programmable multifunctional transmitter

| Type of measurement  | Wiring  |         |
|--|---------|---------|
|  | Input 1 | Input 2 |
| Direct current mA<br>(Input 2 only in corresponding device type) |         |         |


**Table 3: Measuring method combination options**

| Input 1 measuring method | Input 2 measuring method | U [mV]         |          | U [V] 1  |                 | I [mA] 1        |      | TC ext. earthed |        | TC int. earthed |          | R 2L | R 3L | RTD 2L | RTD 3L | I [mA] 2 |
|--------------------------|--------------------------|----------------|----------|----------|-----------------|-----------------|------|-----------------|--------|-----------------|----------|------|------|--------|--------|----------|
|                          |                          | U [mV] earthed | U [mV] 1 | I [mA] 1 | TC ext. earthed | TC int. earthed | R 2L | R 3L            | RTD 2L | RTD 3L          | I [mA] 2 |      |      |        |        |          |
| Terminals                | 7,8                      | 6,4            | 5,4      | 7,8      | 7,8             | 2,7,8           | 2,8  | 2,7,8           | 2,8    | 2,7,8           | 6,4      |      |      |        |        |          |
| U [mV] earthed           | 3,4                      | ✓              | ✓        | ✓        | ✓               | ✓               | ✓    | ✓               | ✓      | ✓               | ✓        | ✓    | ✓    | ✓      | ✓      | ✓        |
| U [V] 1                  | 6,4                      | ✓              |          | ✓        | ✓               | ✓               | ✓    | ✓               | ✓      | ✓               | ✓        | ✓    | ✓    | ✓      | ✓      |          |
| I [mA] 1                 | 5,4                      | ✓              | ✓        |          | ✓               | ✓               | ✓    | ✓               | ✓      | ✓               | ✓        | ✓    | ✓    | ✓      | ✓      | ✓        |
| TC ext. earthed          | 3,4                      | ✓              | ✓        | ✓        | ✓               | ✓               | ✓    | ✓               | ✓      | ✓               | ✓        | ✓    | ✓    | ✓      | ✓      | ✓        |
| TC int. earthed          | 3,4                      | ✓              | ✓        | ✓        | ✓               | ✓               | ✓    | ✓               | ✓      | ✓               | ✓        | ✓    | ✓    | ✓      | ✓      | ✓        |
|                          | 1,3,4                    | ✓              |          |          | ✓               |                 |      |                 |        |                 |          |      |      |        |        |          |
| R 2L                     | 1,4                      | ✓              |          |          | ✓               |                 |      |                 |        |                 |          | ✓    | ✓    | ✓      | ✓      | ✓        |
| R 3L                     | 1,3,4                    | ✓              |          |          | ✓               |                 |      |                 |        |                 |          | ✓    | ✓    | ✓      | ✓      | ✓        |
| R 4L                     | 1,2,3,4                  | ✓              |          |          | ✓               |                 |      |                 |        |                 |          |      |      |        |        |          |
| RTD 2L                   | 1,4                      | ✓              |          |          | ✓               |                 |      |                 |        |                 |          | ✓    | ✓    | ✓      | ✓      | ✓        |
| RTD 3L                   | 1,3,4                    | ✓              |          |          | ✓               |                 |      |                 |        |                 |          | ✓    | ✓    | ✓      | ✓      | ✓        |
| WF                       | 1,3,4                    | ✓              |          |          | ✓               |                 |      |                 |        |                 |          | ✓    | ✓    | ✓      | ✓      | ✓        |
| WF_DIN                   | 1,3,4                    | ✓              |          |          | ✓               |                 |      |                 |        |                 |          | ✓    | ✓    | ✓      | ✓      | ✓        |
| RTD 4L                   | 1,2,3,4                  | ✓              |          |          | ✓               |                 |      |                 |        |                 |          |      |      |        |        |          |


- 1 Selectable only in device type 1x direct current [mA] and 1x high voltage [V]
- 2 Selectable only in device type 2x direct current [mA]

### Dimensional drawing

#### Screw terminals

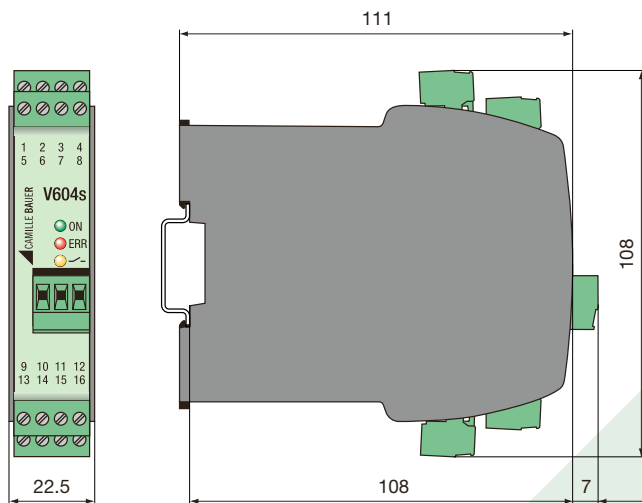

#### Spring cage terminals

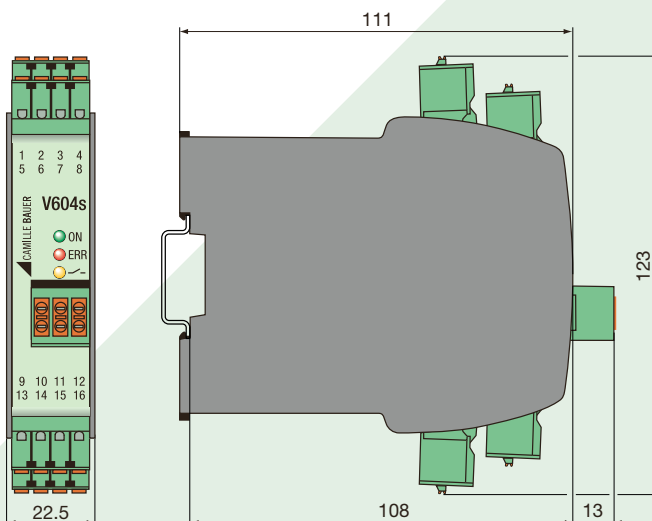

### Scope of supply

- 1 SINEAX V604s
- 1 Safety Instructions 168501
- 1 Software and Docu-CD 156027

### Accessories

- USB-RS485 converter  
(for programming the V604s)

Article No. 163 189

# SINEAX V604s

## Programmable multifunctional transmitter

### Ordering details

#### Standard versions

The following transmitter types programmed in basic configuration are available as standard versions. An indication of the article number is sufficient:

| Version Configuration  | Order-code           | Article No. |
|--|----------------------|-------------|
| Device versions for high DC voltages:<br>DC voltages of up to 600VDC can be measured at one input.<br>In addition, mV, RTD, TC and resistance measurements are possible at both inputs. At one input mA.<br>The device is supplied with screw terminals and a limit value relay.<br>The following configuration is preset:<br>Input 1: 0...1000 mV / Input 2: not used<br>Output 1: 4...20 mA / Output 2: not used                                   | 604s-1110 A1A0 00101 | 168329      |
| Device version without a high DC input:<br>Contrary to the version for high voltages, mA signals can be processed simultaneously at both inputs of this device version. In addition, mV, RTD, TC and resistance measurements are possible.<br>The device is supplied with screw terminals and a limit value relay.<br>The following configuration is preset:<br>Input 1: 4...20 mA / Input 2: 4...20 mA<br>Output 1: 4...20 mA / Output 2: 4...20 mA | 604S 1110A1C0 C0111  | 169624      |

#### Please note:

This are two hardware platforms.

A SINEAX V604s with high DC Voltage cannot be configured to 2 x mA inputs afterwards, just as a SINEAX V604s with 2 x mA cannot measure a high DC Voltage.

| V604s, Programmable                              | 604s |
|--|------|
| <b>Features, Selection</b>                       |      |
| <b>1. Mechanical design</b>                      |      |
| Top-hat rail housing                             | 1    |
| <b>2. Version</b>                                |      |
| Standard with screw terminals                    | 1    |
| Standard with spring cage terminals              | 2    |
| <b>3. Climatic rating</b>                        |      |
| Standard climatic rating                         | 1    |
| <b>4. Test certificate</b>                       |      |
| without test certificate                         | 0    |
| with test certificate German                     | D    |
| with test certificate English                    | E    |
| <b>5. Configuration</b>                          |      |
| <b>Basic configuration:</b>                      | G    |
| Hardware layout for measuring mA at both inputs. |      |
| Voltage >1 VDC up to 300 VDC is not possible.    |      |
| <b>Configured:</b>                               |      |
| Input 1: 4...20 mA / Input 2: 4...20 mA          |      |
| Output 1: 4...20 mA / Output 2: 4...20 mA        |      |
| Programmed to order                              | A    |

| V604s, Programmable                  | 604s |
|--------------------------------------|------|
| <b>Features, Selection</b>           |      |
| <b>6. Mains ripple suppression</b>   |      |
| 50Hz                                 | 1    |
| 60Hz                                 | 2    |
| <b>7. Input 1</b>                    |      |
| mV – Input (range –1000 ... 1000 mV) | A    |
| [mV]: _____                          |      |
| V – Input (range –600 ... 600 V)     | B    |
| [V]: _____                           |      |
| mA – Input (range –50 ... 50 mA)     | C    |
| [mA]: _____                          |      |
| Thermocouple (internal compensation) | D    |
| Resistance thermometer 2-wire        | E    |
| Resistance thermometer 3-wire        | F    |
| Resistance thermometer 4-wire        | G    |
| Resistance sensor 2-wire             | H    |
| Resistance sensor 3-wire             | J    |
| Resistance sensor 4-wire             | K    |
| mV – Input: minimum span 2 mV        |      |
| V – Input: minimum span >1 V         |      |
| mA – Input: minimum span 0,2 mA      |      |

# SINEAX V604s

## Programmable multifunctional transmitter

| V604s, Programmable                                  | 604s |
|--|------|
| <b>Features, Selection</b>                           |      |
| <b>8. Sensor Type Input 1</b>                        |      |
| Not used   | 0    |
| Type B (Range 0 ... 1820 °C)<br>[°C]: _____          | A    |
| Type E (Range -270 ... 1000 °C)<br>[°C]: _____       | B    |
| Type J (Range -210 ... 1200 °C)<br>[°C]: _____       | C    |
| Type K (Range -270 ... 1372 °C)<br>[°C]: _____       | D    |
| Type L (Range -200 ... 900 °C)<br>[°C]: _____        | E    |
| Type N (Range -270 ... 1300 °C)<br>[°C]: _____       | F    |
| Type R (Range -50 ... 1768 °C)<br>[°C]: _____        | G    |
| Type S (Range -50 ... 1768 °C)<br>[°C]: _____        | H    |
| Type T (Range -270 ... 400 °C)<br>[°C]: _____        | J    |
| Type U (Range -200 ... 600 °C)<br>[°C]: _____        | K    |
| Type W5Re-W26Re (Range 0 ... 2315 °C)<br>[°C]: _____ | L    |
| Type W3Re-W25Re (Range 0 ... 2315 °C)<br>[°C]: _____ | M    |
| RTD Pt 100 (Range -200 ... 850 °C)<br>[°C]: _____    | N    |
| RTD Pt 1000 (Range -200 ... 850 °C)<br>[°C]: _____   | O    |
| RTD Ni 100 (Range -60 ... 250 °C)<br>[°C]: _____     | P    |
| RTD Ni 1000 (Range -60 ... 250 °C)<br>[°C]: _____    | Q    |
| Resistor (Range 0 ... 5000 Ω)<br>[W]: _____          | R    |
| Type B: minimum Span 635 K                           |      |
| Type E: minimum Span 34 K                            |      |
| Type J: minimum Span 39 K                            |      |
| Type K: minimum Span 50 K                            |      |
| Type L: minimum Span 38 K                            |      |
| Type N: minimum Span 74 K                            |      |
| Type R: minimum Span 259 K                           |      |
| Type S: minimum Span 265 K                           |      |
| Type T: minimum Span 50 K                            |      |
| Type U: minimum Span 49 K                            |      |
| Type W5Re-W26Re: minimum Span 135 K                  |      |
| Type W3Re-W25Re: minimum Span 161 K                  |      |
| RTD Pt 100: minimum Span 20 K                        |      |
| RTD Pt 1000: minimum Span 20 K                       |      |

| V604s, Programmable                                  | 604s |
|--|------|
| <b>Features, Selection</b>                           |      |
| RTD Ni 100: minimum Span 15 K                        |      |
| RTD Ni 1000: minimum Span 15 K                       |      |
| Resistor: minimum Span 8                             |      |
| <b>9. Input 2</b>                                    |      |
| Not used   | 0    |
| mV – Input (Range -1000 ... 1000 mV)<br>[mV]: _____  | A    |
| mA – Input (Range -50 ... 50 mA)<br>[mA]: _____      | C    |
| Thermocouple (internal compensation)                 | D    |
| Resistance thermometer 2-wire                        | E    |
| Resistance thermometer 3-wire                        | F    |
| Resistance sensor 2-wire                             | H    |
| Resistance sensor 3-wire                             | J    |
| mV – Input: minimum Span 2 mV                        |      |
| mA – Input: minimum Span 0,2 mA                      |      |
| <b>10. Sensor Type Input 2</b>                       |      |
| Not used   | 0    |
| Type B (Range 0 ... 1820 °C)<br>[°C]: _____          | A    |
| Type E (Range -270 ... 1000 °C)<br>[°C]: _____       | B    |
| Type J (Range -210 ... 1200 °C)<br>[°C]: _____       | C    |
| Type K (Range -270 ... 1372 °C)<br>[°C]: _____       | D    |
| Type L (Range -200 ... 900 °C)<br>[°C]: _____        | E    |
| Type N (Range -270 ... 1300 °C)<br>[°C]: _____       | F    |
| Type R (Range -50 ... 1768 °C)<br>[°C]: _____        | G    |
| Type S (Range -50 ... 1768 °C)<br>[°C]: _____        | H    |
| Type T (Range -270 ... 400 °C)<br>[°C]: _____        | J    |
| Type U (Range -200 ... 600 °C)<br>[°C]: _____        | K    |
| Type W5Re-W26Re (Range 0 ... 2315 °C)<br>[°C]: _____ | L    |
| Type W3Re-W25Re (Range 0 ... 2315 °C)<br>[°C]: _____ | M    |
| RTD Pt 100 (Range -200 ... 850 °C)<br>[°C]: _____    | N    |
| RTD Pt 1000 (Range -200 ... 850 °C)<br>[°C]: _____   | O    |
| RTD Ni 100 (Range -60 ... 250 °C)<br>[°C]: _____     | P    |
| RTD Ni 1000 (Range -60 ... 250 °C)<br>[°C]: _____    | Q    |



# SINEAX V604s

## Programmable multifunctional transmitter

| V604s, Programmable   | 604s |
|---|------|
| <b>Features, Selection</b>  |      |
| Resistor (Range 0 ... 5000 $\Omega$ )<br>[W]: _____<br>minimum Span ditto Sensor Type Input 1 | R    |
| <b>11. Output signal / Measuring output 1</b>   |      |
| current (Range -20 ... 20 mA)<br>[mA]: _____  | 1    |
| voltage (Range -10 ... 10 V)<br>[V]: _____  | 2    |
| <b>12. Output signal / Measuring output 2</b>   |      |
| Not used  | 0    |
| current (Range -20 ... 20 mA)<br>[mA]: _____  | 1    |
| voltage (Range -10 ... 10 V)<br>[V]: _____  | 2    |
| <b>13. Relay contact output</b>   |      |
| Relay, normally open contact (NO),<br>AC: 2A/250V, DC: 2A/30V                                 | 1    |
| Digital output for fast pulse (S0) Umax / Imax:<br>27VDC / 27mA                               | 2    |

### Basic configurations

| Type  | Basic configuration                                 |
|---|---|
| Standard, with measuring for 2x direct current [mA] | Input 1 and 2: 4...20mA<br>Output 1 and 2: 4...20mA |



**CAMILLE BAUER**

**Rely on us.**

Camille Bauer Metrawatt AG  
Aargauerstrasse 7  
CH-5610 Wohlen / Switzerland  
Phone: +41 56 618 21 11  
Fax: +41 56 618 21 21  
info@cbmag.com  
www.camillebauer.com