

- According to DIN EN 61810-1, DIN EN 61810-3 (Type A)
- With forcibly guided contacts
- High switching reliability due to crown contacts
- Clearance and creepage distances:
Contact - coil ≥ 8 mm
Contact - contact ≥ 5.5 mm
- **Double and reinforced insulation with pollution degree 2**
- Overvoltage category: III
- High voltage resistance ≥ 4 kV
- High mechanical service life
- High temperature range
at OA 5601 and OA 5602: $-40 \dots +85$ °C
at OA 5603: $-40 \dots +75$ °C
- High continuous thermal current $I_{th} = 16$ A (UL 10 A)
- High voltage range $0.7 \dots 1.6 U_N$
- As option wash proof RT III

Applications

- To be used in circuits for safety applications
- Escalators and walkways
- Elevators for men and load
- Railway technology
- Medical technology

Approvals and Markings



Technical Data

Relay type	OA 5601	OA 5602	OA 5603
1.0 Coil			
1.1 Nominal voltage	DC 6, 12, 24, 48, 60, 110 V (others on request)		
1.2 Nominal consumption	0.75 W	1 W	1.25 W ¹⁾
1.11 Voltage range	0.7 ... 1.6 U _N	0.7 ... 1.6 U _N	0.7 ... 1.6 U _N
1.3 Holding power (at 0.5 x U _N)	0.19 W	0.25 W	0.32 W
2.0 Contacts			
2.1 Contact arrangement (Type A)	3 NO / 1 NC 2 NO / 2 NC	5 NO / 1 NC 4 NO / 2 NC 3 NO / 3 NC 2 NO / 4 NC	7 NO / 1 NC : : 2 NO / 6 NC
2.2 Contact material	AgSnO ₂ + 0.2 µm Au; AgNi + 0.2 µm Au, AgNi + 5 µm Au		
2.3 Rated insulation voltage	AC 250 V		
Switching voltage min./max.	AC/DC 10 V / DC 250 V, AC 400 V (AC/DC 2 V / AC/DC 60 V) ²⁾		
2.4 Limiting continuous current I _{th} max. (TÜV) ⁷⁾	3 x 16 A 3 x 10 A	4 x 16 A 5 x 10 A	4 x 16 A 7 x 10 A
Limiting continuous current I _{th} max. (UL)	3 x 10 A	5 x 10 A	7 x 10 A
Switching current min./max	10 mA ⁴⁾ / 16 A; (UL 10 A) (2 mA / 0.3 A) ²⁾		
2.5 Switching power min./max.	0.1 VA / 4000 VA; (UL 2500 VA) (10 mVA / 12 VA) ²⁾		
Switching power min./max.	0.1 ⁴⁾ ... 400 W (UL 240 W) (10 mW / 12 W) ²⁾ (see limit curve for arc-free operation)		
2.6 Switching capacity to IEC/EN 60947-5-1			
AC 15 ⁵⁾		NO: AC 250 V / 3 A	NC: AC 250 V / 2 A
AC 15 ⁶⁾		NO: AC 250 V / 5 A	NC: AC 250 V / 2 A
DC 13 ⁵⁾		NO: DC 24 V / 2 A	NC: DC 24 V / 2 A
DC 13 ⁵⁾ at 0.1 Hz to UL 508		NO: DC 24 V / 6 A	NC: DC 24 V / 6 A
2.7 Electrical life	A300		
at AC 230 V, 6 A, cosφ = 1	At 1 s ON, 1 s OFF (see contacts service life)		
at AC 230 V, 10 A, cosφ = 1	> 7 x 10 ⁵ switching cycles, AgSnO ₂ / > 5 x 10 ⁵ switching cycles, AgNi10 > 5 x 10 ⁵ switching cycles, AgSnO ₂ / > 4 x 10 ⁵ switching cycles, AgNi10		
2.8 Switching frequency max.	10 switching cycles / s		
2.9 Response time / Release time	Typically 27 ms / Typically 5 ms		
2.10 Contact force	≥ 14 cN		
2.14 Contact gap	> 0.5 mm ³⁾		
3.0 Other			
3.1 Mechanical life	$> 30 \times 10^6$ switching cycles		
3.2 Temperature range	$-40 \dots +85$ °C	$-40 \dots +85$ °C	$-40 \dots +75$ °C
3.3 Degree of protection	Solder line proof RT II as option wash proof RT III		
3.4 Test procedure	A (group mounting)		
3.5 Vibration resistance	10 ... < 60 Hz; 0,35 mm Amplitude; (all contacts) EN 60068-2-6 60 ... 200 Hz, ≤ 5 g (NO contact) EN 60068-2-6 60 ... 200 Hz, $\leq 1,5$ g (NC contact) EN 60068-2-6		
3.6 Climate resistance	40 / 085 / 04; A / B / D EN 60068-1		
3.7 Short circuit strength 1 kA / AC 250 V	AgSnO ₂	NO: 16 A (UL 10 A) gG / gL / NC: 10 A gG / gL	EN 60947-5-1
	AgNi	NO: 16 A (UL 10 A) gG / gL / NC: 6 A gG / gL	EN 60947-5-1

¹⁾ For OA 5603.46 (2 NO / 6 NC) and OA 5603.56 (3 NO / 5 NC) nominal consumption is 1.65 W

²⁾ Typical values for AgNi10-Contacts + 5 µm Au ³⁾ Over entire service life acc. to DIN EN 61810-3

⁴⁾ Typical values for AgSnO₂ and AgNi

⁵⁾ Values for AgNi-Contacts ⁶⁾ Values for AgSnO₂-Contacts

⁷⁾ See operating voltage limit curve

Technical Data

3.8	Insulation acc. to IEC 60664-1, EN 50178			
	Rated insulation voltage		AC 250 V	
	Pollution degree		3 / 2 (double and reinforced insulation)	
	Overvoltage category		III	
	Test voltage			
	Contact- Coil (1 min)		≥ AC 4 kV eff.	
	Contact-Contact (1min)		≥ AC 4 kV eff.	
	Contact open (1 min)		≥ AC 1.5 kV eff.	
	Transient voltage			
	Contact- Coil (1,2 - 50 μs)		≥ 6 kV	
	Clearance and creepage distances			
	Contact- Coil		≥ 8 mm	
	Contact-Contact		≥ 5.5 mm	
3.9	Weight	Approx. 78 g	Approx. 85 g	Approx. 95 g
4.0 Packing				
4.1	On cardboard in slipcase	20 pieces	15 pieces	15 pieces
4.2	In case package	100 pieces	75 pieces	75 pieces
5.0 Solder method				
5.1	Solder method /-temperature /-duration		Wave soldering / 260 °C / 5 s	

Design versions

U _N (DCV)	Voltage range (DC V)	OA 5601				OA 5602				OA 5603							
		R _{Coil} Ω±10%	.52 2 NO, 2 NC	.48 3 NO, 1 NC	R _{Coil} Ω±10%	.18 3 NO, 3 NC	.50 2 NO, 4 NC	.54 4 NO, 2 NC	R _{Coil} Ω±10%	.63 7 NO, 1 NC	.59 6 NO, 2 NC	.58 5 NO, 3 NC	.57 4 NO, 4 NC	R _{Coil} Ω±10%	.56 3 NO, 5 NC	.46 2 NO, 6 NC	

AgSnO₂-Contacts + 0.2 μm Au

6	4.2 ... 9.6	48	2091	2121	35	2001	2031	2061	29	2151	2181	2271	2211	21	2301	2241
12	8.4 ... 19.2	192	2092	2122	140	2002	2032	2062	112	2152	2182	2272	2212	88	2302	2242
24	16.8 ... 38.4	770	2093	2123	570	2003	2033	2063	460	2153	2183	2273	2213	370	2303	2243
48	33.6 ... 76.8	2880	2094	2124	2300	2004	2034	2064	1800	2154	2184	2274	2214	1400	2304	2244
60	42.0 ... 96.0	4800	2095	2125	3600	2005	2035	2065	2880	2155	2185	2275	2215	2230	2305	2245
110	77.0 ... 176.0	16000	2096	2126	12100	2006	2036	2066	9500	2156	2186	2276	2216	7150	2306	2246

AgNi 10-Contacts + 0.2 μm Au

6	4.2 ... 9.6	48	2101	2131	35	2011	2041	2071	29	2161	2191	2281	2221	21	2311	2251
12	8.4 ... 19.2	192	2102	2132	140	2012	2042	2072	112	2162	2192	2282	2222	88	2312	2252
24	16.8 ... 38.4	770	2103	2133	570	2013	2043	2073	460	2163	2193	2283	2223	370	2313	2253
48	33.6 ... 76.8	2880	2104	2134	2300	2014	2044	2074	1800	2164	2194	2284	2224	1400	2314	2254
60	42.0 ... 96.0	4800	2105	2135	3600	2015	2045	2075	2880	2165	2195	2285	2225	2230	2315	2255
110	77.0 ... 176.0	16000	2106	2136	12100	2016	2046	2076	9500	2166	2196	2286	2226	7150	2316	2256

AgNi 10-Contacts + 5 μm Au

6	4.2 ... 9.6	48	2111	2141	35	2021	2051	2081	29	2171	2201	2291	2231	21	2321	2261
12	8.4 ... 19.2	192	2112	2142	140	2022	2052	2082	112	2172	2202	2292	2232	88	2322	2262
24	16.8 ... 38.4	770	2113	2143	570	2023	2053	2083	460	2173	2203	2293	2233	370	2323	2263
48	33.6 ... 76.8	2880	2114	2144	2300	2024	2054	2084	1800	2174	2204	2294	2234	1400	2324	2264
60	42.0 ... 96.0	4800	2115	2145	3600	2025	2055	2085	2880	2175	2205	2295	2235	2230	2325	2265
110	77.0 ... 176.0	16000	2116	2146	12100	2026	2056	2086	9500	2176	2206	2296	2236	7150	2326	2266

Ordering Example

OA 5601. ___ / ___ / 61*)


- Variants
 - 1 = Standard
 - 2 = With square nuts M3
- L = Solder line proof RT II
- W = Wash proof RT III
- Design version
- Contact arrangement (Type A)
 - .52 2 NO / 2 NC
 - .48 3 NO / 1 NC

Notes


For the use and processing of our PCB relays, please refer to the **application and processing instructions** at www.dold.com

*) / 61 cURus approval


Characteristics

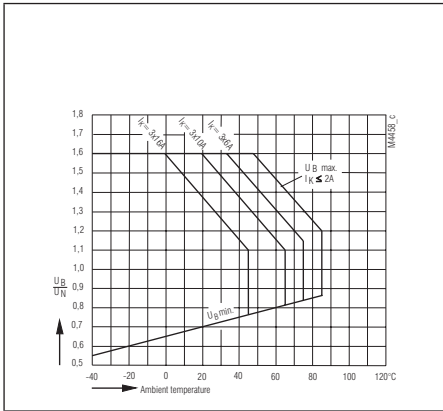


Operating voltage limit curve OA 5601

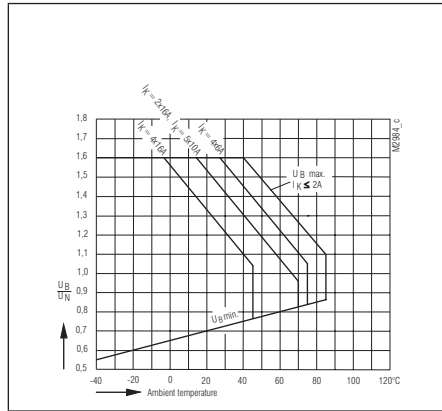


Operating voltage limit curve OA 5602

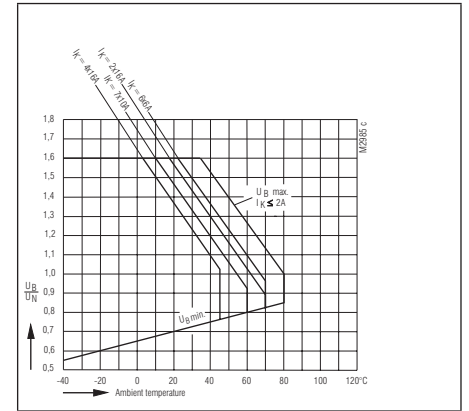


Operating voltage limit curve OA 5603

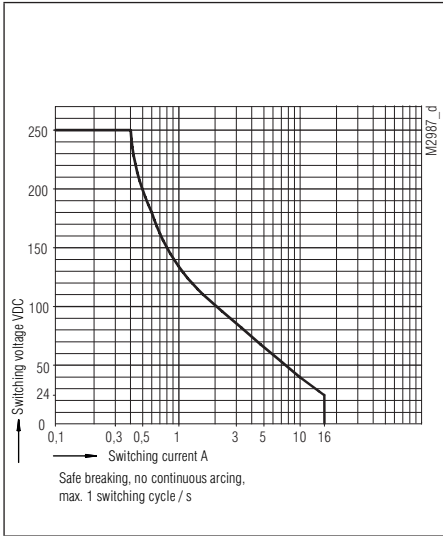


Arc limit curve

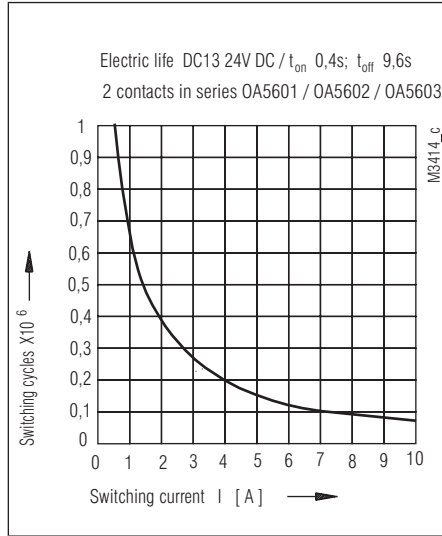



Electrical life

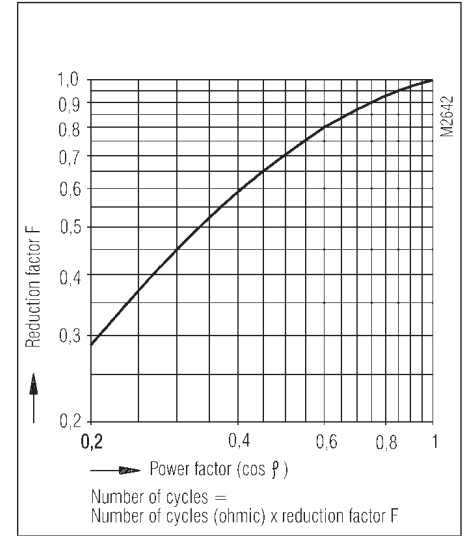

Reduction factor for inductive loads

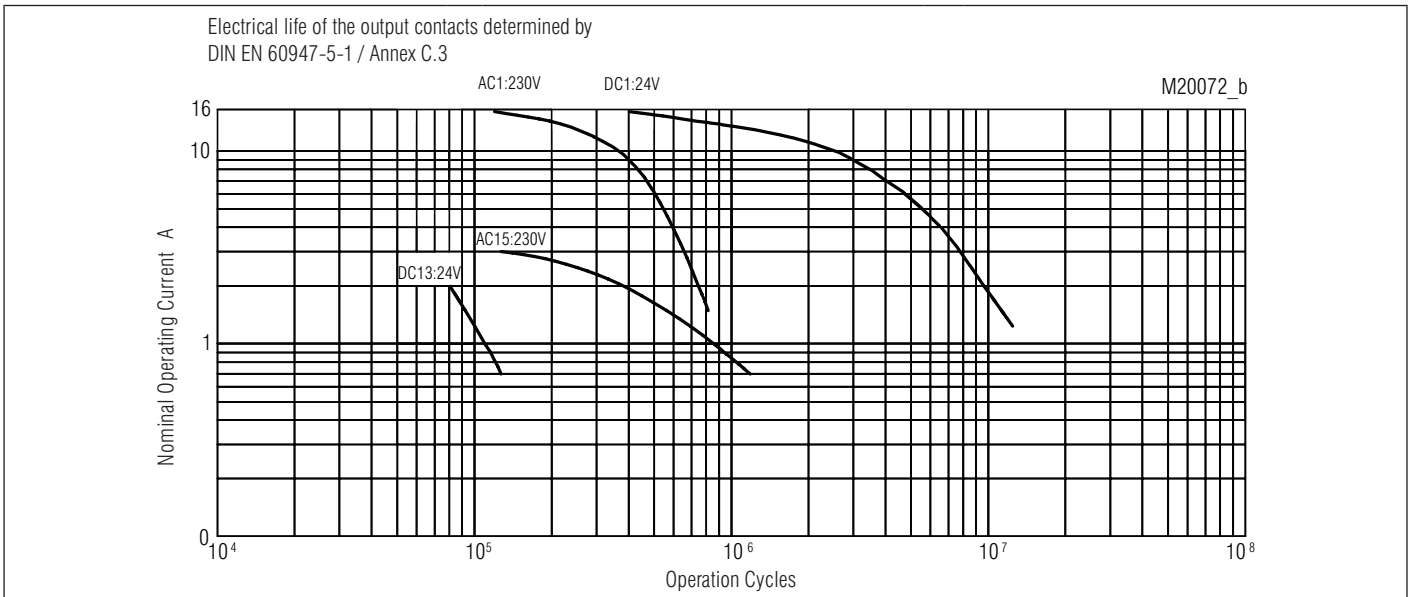


Electrical life for contact material AgNi

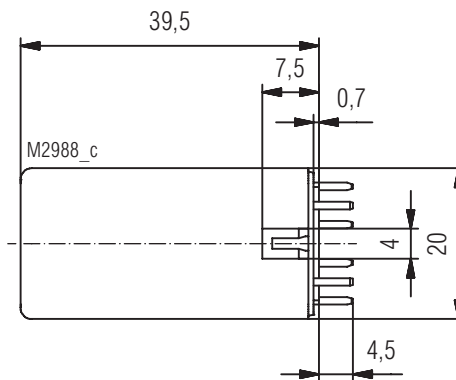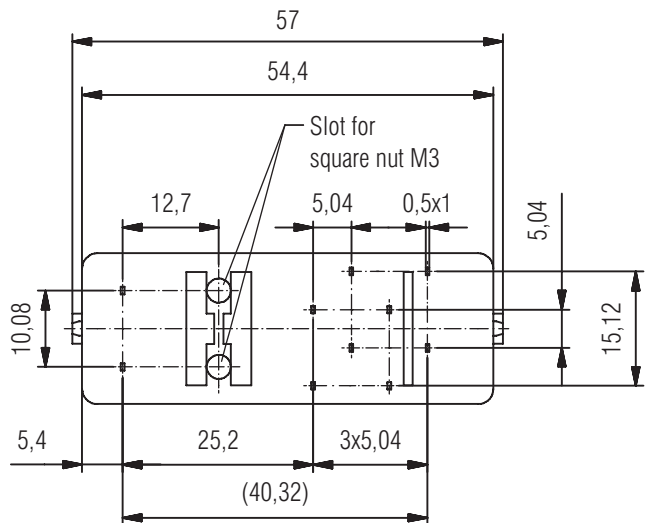


Drilling plan (solder side)



Pin arrangement OA5601.48 3NO/1NC

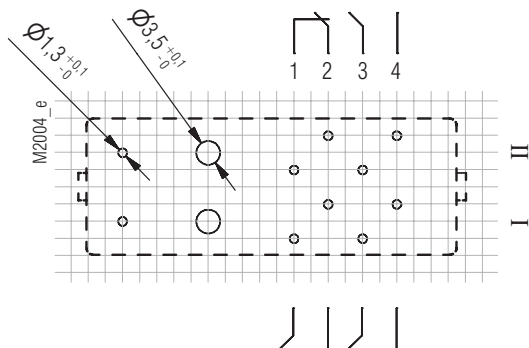

Pin arrangement OA5601.52 2NO/2NC

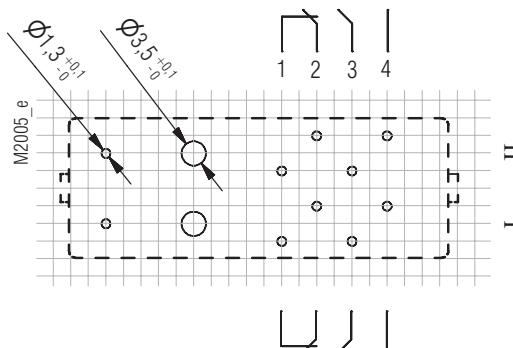


Connection for basic grid dimensions 2.5 mm as well as 2.54 mm according to IEC/EN 60097 and IEC 60326 average

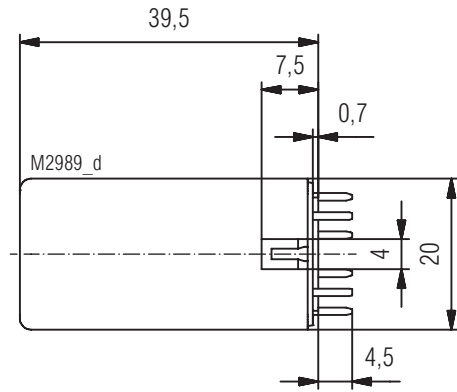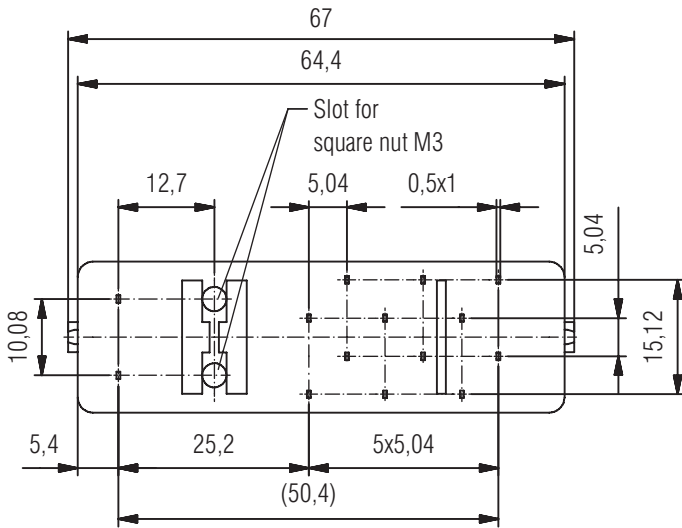


Drilling plan (solder side)


Pin arrangement OA5602.18 3NO/3NC

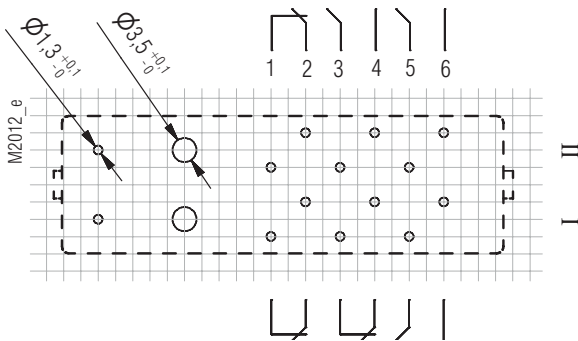


Pin arrangement OA5602.50 2NO/4NC

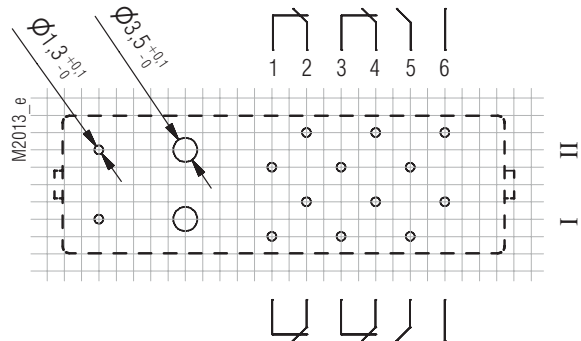


Pin arrangement OA5602.54 4NO/2NC

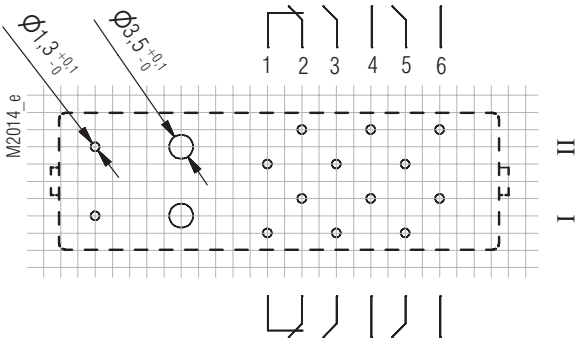

Pin arrangement OA5602.60 5NO/1NC

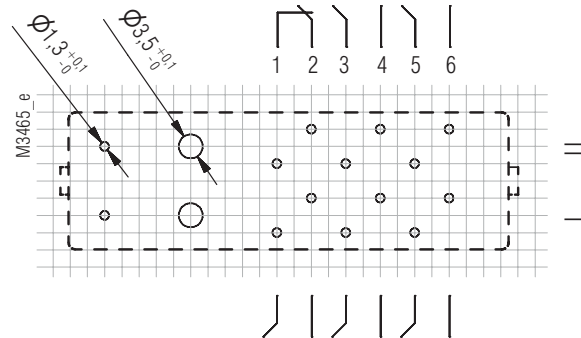


Connection for basic grid dimensions 2.5 mm as well as 2.54 mm according to IEC/EN 60097 and IEC 60326 average

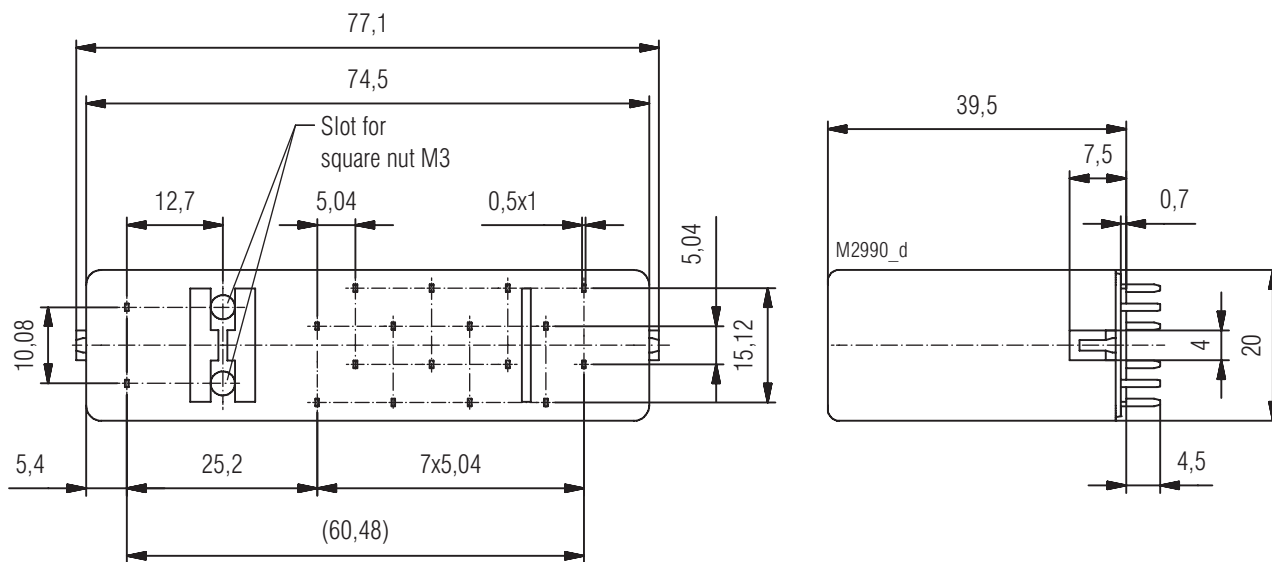


Drilling plan (solder side)


Pin arrangement OA5603.63 7NO/1NC

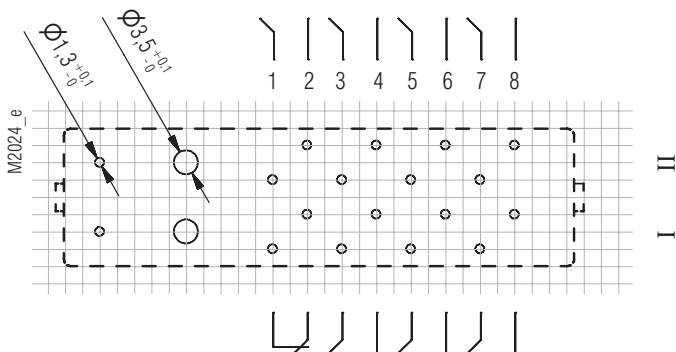


Pin arrangement OA5603.59 6NO/2NC

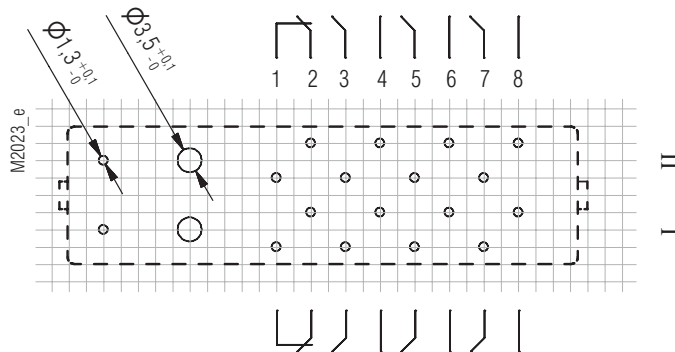

Pin arrangement OA5603.58 5NO/3NC

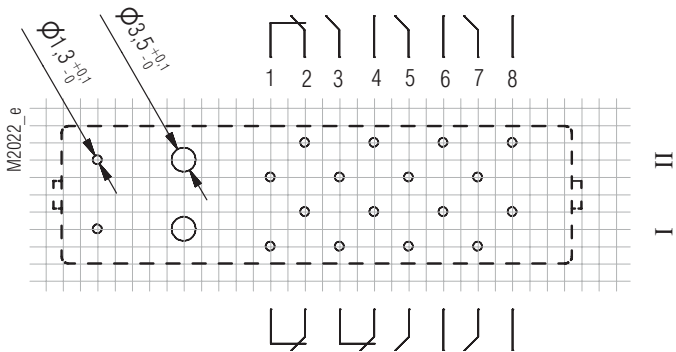


Pin arrangement OA5603.57 4NO/4NC

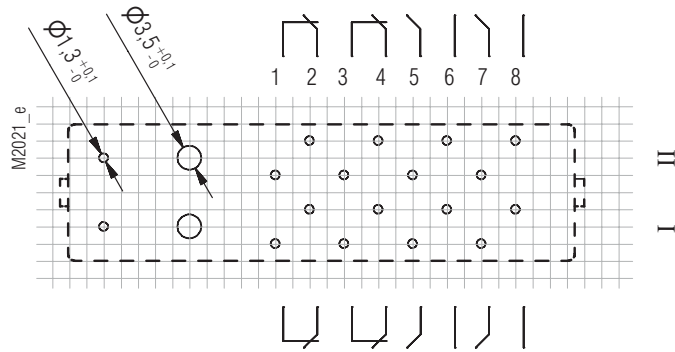


Connection for basic grid dimensions 2.5 mm as well as 2.54 mm according to IEC/EN 60097 and IEC 60326 average

Drilling plan (solder side)

Pin arrangement OA5603.56 3NO/5NC

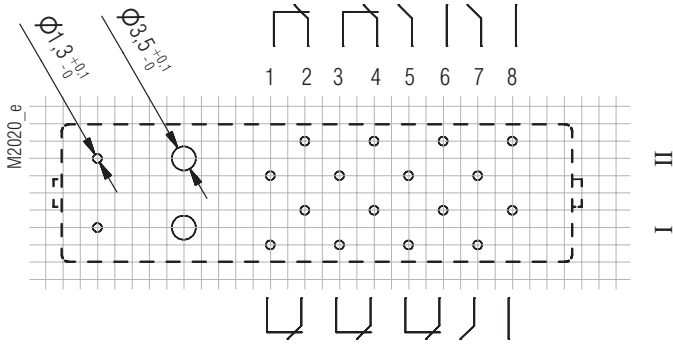


Pin arrangement OA5603.46 2NO/6NC

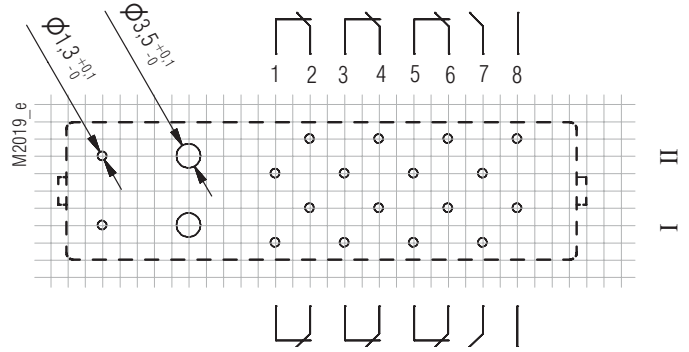


Connection for basic grid dimensions 2.5 mm as well as 2.54 mm according to IEC/EN 60097 and IEC 60326 average

OA 5601, OA 5602, OA 5603 Dimensions wash proof version (RT III) with Vergussplatte

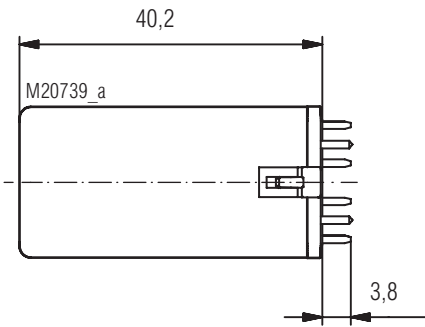

Notes

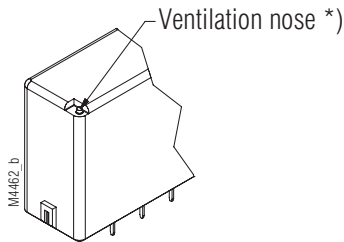



*) When using the maximum switching capacity it is recommended to open the wash proof relay at the indicated position.

Relay socket ET 1415.011/61 for OA 5601

Article number: 0041069

Removal tool ET 1415.941 for relay OA 5601

Article number: 0063094

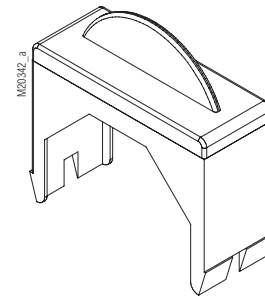
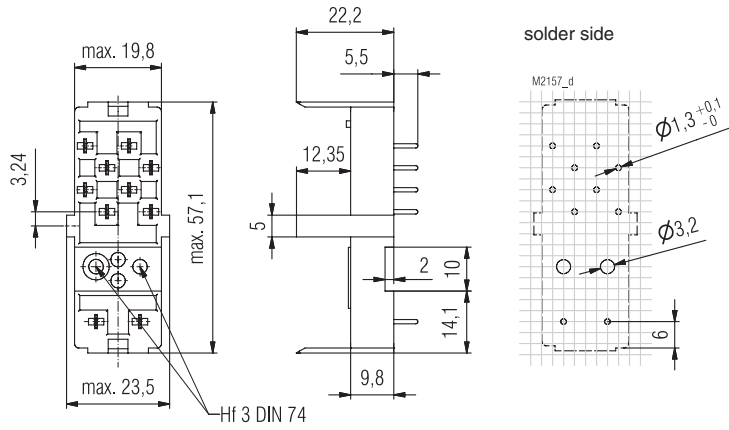


Relay socket ET 1415.012/61 for OA 5602

Article number: 0041065

Removal tool ET 1415.942 for relay OA 5602

Article number: 0063095

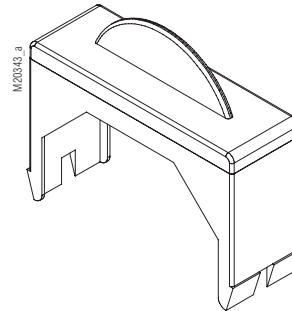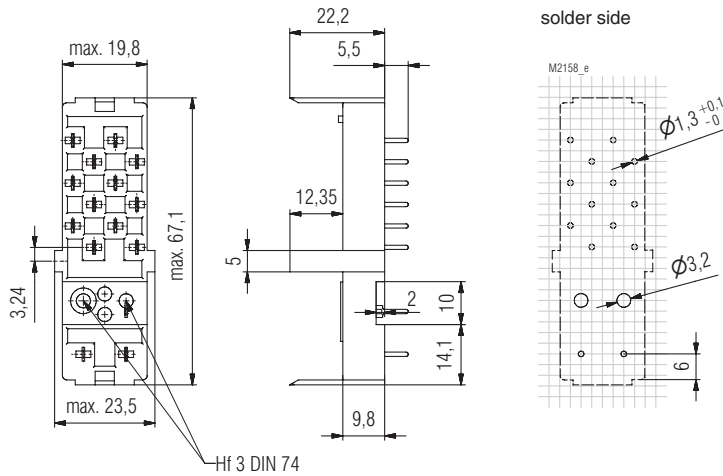

Relay socket ET 1415.013/61 for OA 5603

Article number: 0041070

Removal tool ET 1415.943 for relay OA 5603

Article number: 0063096

