


# Data Sheet for Precision Potentiometer

Multiturn Wirewound Potentiometer

Series ALI17/19

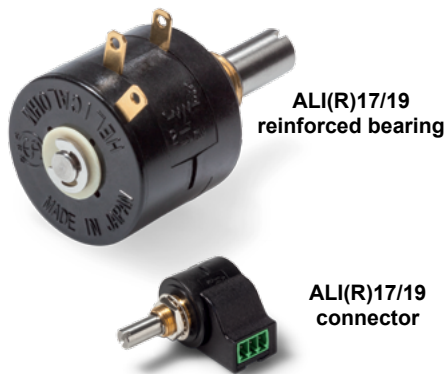

The ALI(R)17/19 potentiometers in 22 mm housing are suitable for applications where a precise multiturn potentiometer increased radial shaft loads is important.

- Robust design for radial shaft load up to 4N
- Simplified installation due to connector version
- Versions ALIR17/19 with integrated slipping clutch
- With many options

The potentiometer ALI(R)17 / ALI(R)19 (Ø6,35 / Ø6,00 mm) enables operation with a radial shaft load of up to 4N. The low-wear polymer bearing in the lid provides more stability and makes the potentiometer particularly robust. In addition, an optional integrated slipping clutch protects the potentiometer from damage by overrunning the end stops and facilitates the zero point adjustment. There is a screw driver slot at the top of the shaft for adjustment purposes and the potentiometer is available in 3-, 5- and 10-turn versions (optional in 1, 2, 4, 6, 7 or 8 turn). The radial gold-plated connection pins are suitable for flat connectors (2.8 mm according to DIN 46247 part 3) and the connector version simplifies the mounting.

Electrical Data	3-turn	5-turn	10-turn
Effective electrical angle of rotation 1.)	1080° ±5°	1800° ±5°	3600° ±5°
Total resistance 1.)	0.1..10 kOhm	0.1..50 kOhm	0.1..100 kOhm
Resistance tolerance	±5% (±1%)		
Independent linearity (best straight line) 1.)	±0.25%	±0.25%	±0.15% R≥ 5k ±0.25% R< 5k (±0.1% R≥ 5k / ±0.15% R< 5k)
Theoretical resolution 1.)	Depends on resistance value (see table below)		
Backlash (Hysteresis) 1.)	≤ 2°		
Rotational noise (ENR) 1.) (Method C)	100 Ohm		
Max. / recommended wiper current 1.)	35 mA / 2 µA		
Power rating @ 70°C (0W @ 105°C)	0.5 W	1 W	2 W
Insulation Voltage 1.)	1000 VAC, 1min		
Insulation Resistance 1.)	1000 MOhm @ 500 VDC		

Mechanical Data, Miscellaneous	3-turn	5-turn	10-turn
Mechanical angle of rotation	1080° +10°	1800° +10°	3600° +10°
Lifetime (90% el. eff. angle half sine) 2.)	300.000 rotations	500.000 rotations	1 Mio. rotations
Max. operational speed	40 rev. / min.		
Bearing	Brass bearing front and polymer bearing rear side		
Operational torque @ ambient temperature 1.) 2.)	10 Nmm		
End stop torque 1.) 2.)	35 Ncm		
Operating temperature range	-55 °C up to +105 °C		
Storage temperature range	-55 °C up to +105 °C		
Protection grade (IEC 60529)	IP40		
Protection option D shaft sealing (IEC 60529)	IP65 optional		
Vibration (IEC 68-2-6, Test Fc)	15g 10Hz up to 2000Hz x 12h		
Shock (IEC 68-2-27, Test Ea)	49g @ 11 ms x 18		
Housing diameter	22 mm		
Housing depth	19 mm		
Shaft diameter (AL17/19)	6.35 mm / 6.00 mm		
Shaft type	Solid shaft		

# Data Sheet for Precision Potentiometer

Multiturn Wirewound Potentiometer

Series ALI17/19

Mechanical Data, Environmental Conditions, Miscellaneous	3-turn	5-turn	10-turn
Max. radial load	≤4 N		
Max. axial load	≤1 N		
Connection type	Gold plated soldering lugs, optional with integrated connector		
Connection position	Radial		
Sensor mounting	Bushing		
Mass	app. 23 g		
Fastening parts included in delivery	Nut, toothed washer		
Fastening torque mounting nut	< 150 Ncm		
Material shaft	Stainless steel		
Material housing	Reinforced fibreglass PA66		

1.) According IEC 60393

2.) Determined by climatic conditions according to IEC 68-1, para. 5.3.1 without load collectives

Please note: Max. permissible supply voltage <75 VDC respectively <50 VAC in addition the max. power rating must be observed

Number of wire turns / resolution										
Resistance value Ohm	100	200	500	1k	2k	5k	10k	20k	50k	100k
Number of wire turns (ALI(R)1703/ALI(R)1903)	820	920	1270	1350	1270	1990	2570	-	-	-
Number of wire turns (ALI(R)1705/ALI(R)1905)	1240	1560	2000	2510	2400	3200	3900	4800	5500	-
Number of wire turns (ALI(R)1710/ALI(R)1910)	2100	2480	3300	4000	5020	5000	6400	7800	10100	11000

Resolution in degree E.g. R5k 5-turn =  $1800^\circ / 3200 = 0,563^\circ$  per winding resistive wire

# Data Sheet for Precision Potentiometer

Multiturn Wirewound Potentiometer

Series ALI17/19

## Order code

Description	Selection: <b>standard=black/bold</b> , possible <i>options=grey/italic</i>									
<b>Series:</b>	<b>ALI</b>									
<b>Slipping clutch:</b> Without additional mechanics With integrated slipping clutch										
<b>Shaft diameter:</b> Ø 6,35 mm Ø 6,00 mm										
<b>Revolutions with stop:</b> Option 1-turn Option 2-turn <b>3-turn</b> Option 4-turn <b>5-turn</b> Option 6-turn Option 7-turn Option 8-turn - on request <b>10-turn</b>										
<b>Resistance value /Option Tandem:</b> Option 100 Ohm Option 500 Ohm <b>1 kOhm</b> Option 2 kOhm <b>5 kOhm</b> <b>10 kOhm</b> Option 20 kOhm (only 5 to 10 Turn) Option 50 kOhm (only 5 to 10 Turn) Option 100 kOhm (only 10 Turn)										
<b>Resistance tolerance:</b> <b>±5%</b> Option ±1%										
<b>Independent linearity:</b> <b>±0,25% (3 to 5-turn / R&lt; 5k 10-turn)</b> <b>±0,15% R≥ 5k (10-turn)</b> Option ±0,15% (10-turn) R < 5kOhm Option ±0,10% (10-turn) R ≥ 5kOhm										
<b>Electrical connection:</b> <b>With soldering lugs</b> Option with connector										
Option center tap (only 10-turn, not with connector)										
<b>Front shaft:</b> ALI(R)17 = Ø6,35 x 20,6 mm ALI(R)19 = Ø6,00 x 20,6 mm Option shaft length in mm Option shaft diameter in mm (≤6,35 mm)										
<b>Screwdriver slot standard:</b>										
<b>Shaft sealing:</b> Standard is without sealing Option D with shaft sealing										

For higher quantities or on-going demand, additional options are available as described below on request

For Example: Sealed housing case, with high torque, special electrical and mechanical angles of rotation, and special resistance and linearity tolerances. Furthermore we can mount gear wheels or attach cable assemblies with or without connectors and much more.


# Data Sheet for Precision Potentiometer




Multiturn Wirewound Potentiometer

Series ALI17/19

## Drawing

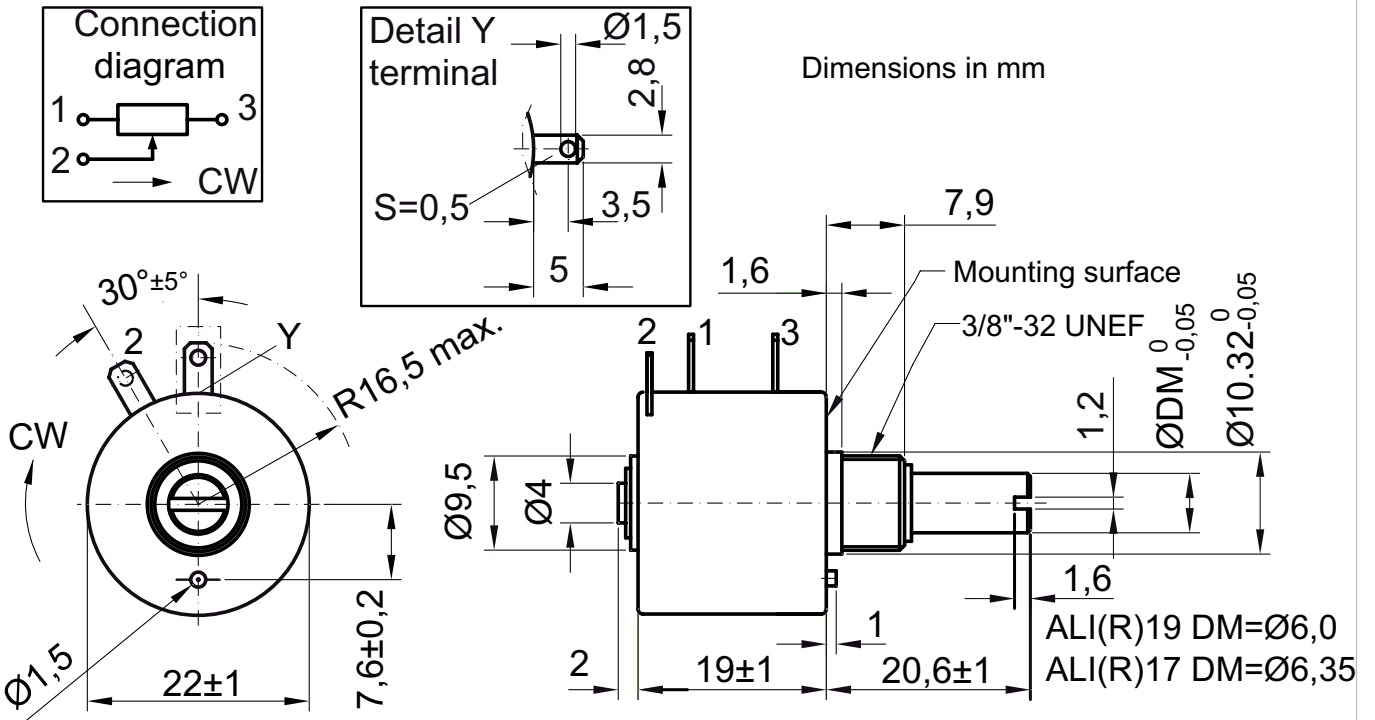

## Connector Version

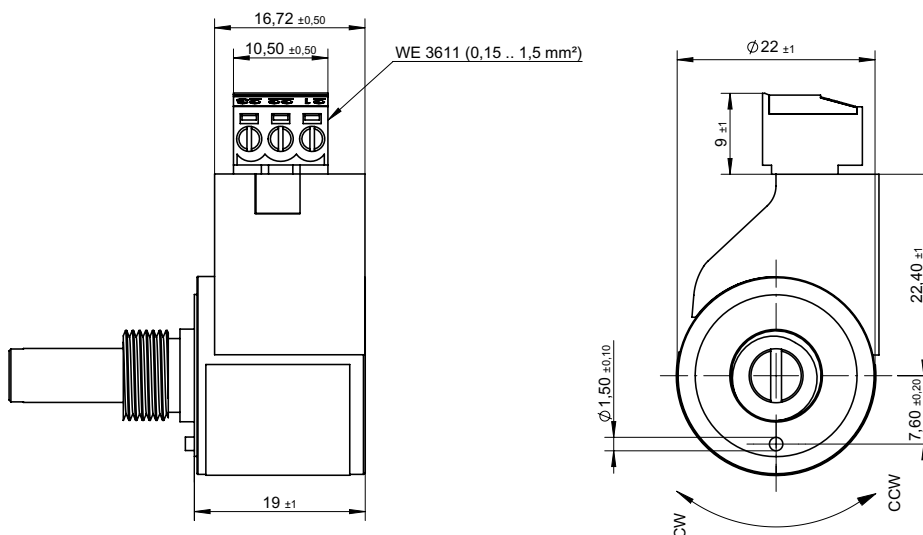

### On Request: Special machining on shaft

Slot




Groove




Flat




Round top

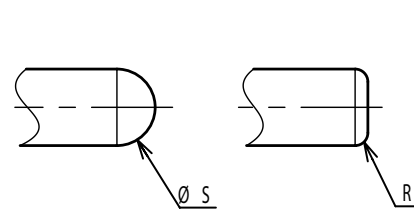


Double side flat

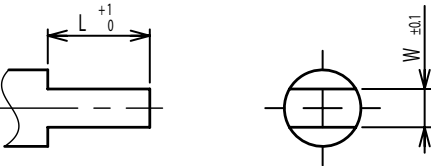


Counterbore hole

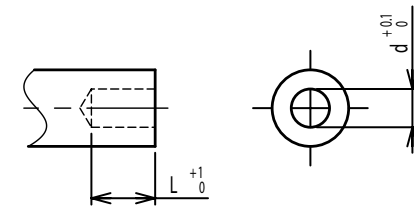


Step

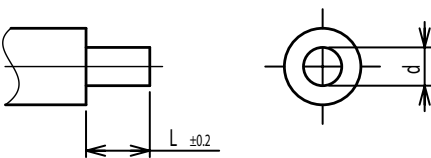


Counterbore screw hole

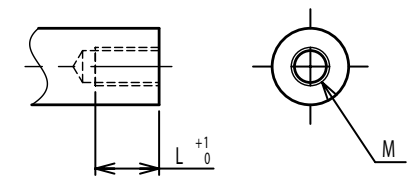


Screw Thread

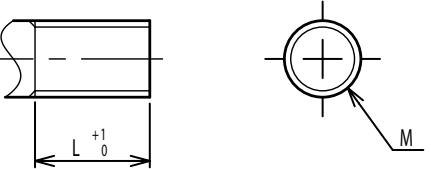

Pin hole

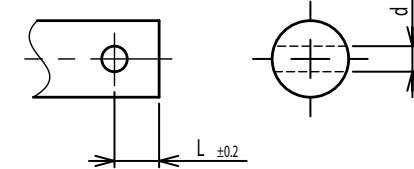

Knurled(Parallel)

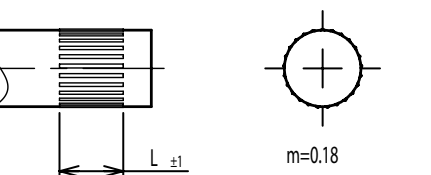

Screw thread inside hole

