

Specification

- IP65 100% ED coil
- Opening: 5~20 ms, Closing: 10~40 ms

Power consumption

Coil power	4	5	3E
AC (VA)	19.5	23.0	9.2
DC (W)	15.0	18.5	10.0

Weight

Model	MEP		
Code \ Coil	4	5	3E
N.W (kg)			
10	0.44	0.52	0.74
15	0.41	0.49	0.71

Order example

MEP – 10 – 0 – N – 4 – □ – AC110 – □

MODEL

CODE

10: 3/8
15: 1/2

SEAL MAT'L

N: NBR
J: EPDM
V: Viton

ORIFICE

0: Standard

COIL

4: #4
5: Bigger
3E: Explosion-Proof (*)

PLUG


Blank: DIN
D: LED
G: 1/2" NPT

VOLTAGE

AC220V(50/60)Hz
AC110V(50/60)Hz
DC24V

PORT THREAD

Blank: Rc thread
G: G thread
NPT: NPT thread

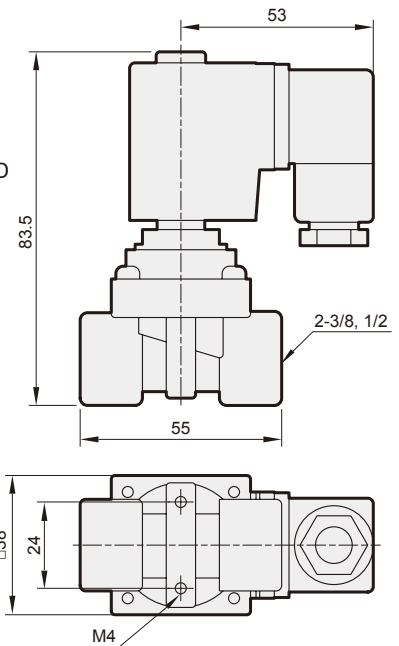

* Explosion-Proof (3E) coil with LED (D) plug is not applicable.

Specification

Model **MEP**: Forged brass body, pressure forming S.S. plate, for water, air. 2/2 way N.C.

Code (Port)	Seal mat'l	Coil	Orifice mm	Temp. °C						Working press. (0~ bar)						VAC. Torr						CV
				Coil 4		Coil 5		Coil 3E		Coil 4		Coil 5		Coil 3E		Coil 4		Coil 5		Coil 3E		
				N	J,V	N	J,V	N	J,V	AC	DC	AC	DC	AC	DC	AC	DC	AC	DC	AC	DC	
10(3/8) 15(1/2)	N J V	4 5 3E	15	-5 ~ 80	-10 ~ 90	-5 ~ 80	-10 ~ 145	-5 ~ 80	-10 ~ 145	0.5	0.2	1.2	0.5	0.2	0.1	400	600	10	400	600	700	2.4